





## New Product Release

# Volcano III Aeration System

**Newly designed float with functional yet decorative contours**


- Handles/tie downs on float
- One float for 1.5-5.5HP units
- Robust frame
- Precision balanced stainless steel prop
- Tool less, easy clean screen
- Removable plug in float for leak inspection
- Adjustable light bracket accommodates one of two different sized light housings
- Stainless steel light housings with tempered glass lenses
- Custom biodegradable oil-cooled, energy efficient, serviceable motors
- Deep water intake option
- Domestic warranty: 5 years on parts & labor: International warranty: 3 years on parts & labor
- UL, cUL listed and CE approved
- Available in 2 patterns: Standard & Etna (below)

Standard	Etna
	
<b>1.5HP</b>	
• 3000048 Volcano III, Standard Pattern, 60Hz	• 3000050 Volcano III, Etna, High Conical, 60Hz
<b>3.5HP</b>	
• 3000053 Volcano III, Standard Pattern, 60Hz	• 3000055 Volcano III, Etna, High Conical, 60Hz
<b>5.5HP</b>	
• 3000654 Volcano III, Standard Pattern, 60Hz	• 3000059 Volcano III, Etna, High Conical, 60Hz



DOMESTIC UNITS	
PART NUMBER	DESCRIPTION
V5312-3SC	Volcano III®, 1.5HP 208-240V 3PH
V5312-SC	Volcano III®, 1.5HP 208-240V 1PH
V5314-3SC	Volcano III®, 1.5HP 440-480V 3PH
V5315-3SC	Volcano III®, 1.5HP 575V 3PH
V5332-3SC	Volcano III®, 3.5HP 208-240V 3PH
V5332-SC	Volcano III®, 3.5HP 208-240V 1PH
V5334-3SC	Volcano III®, 3.5HP 440-480V 3PH
V5335-3SC	Volcano III®, 3.5HP 575V 3PH
V5352-3SC	Volcano III®, 5.5HP 208-240V 3PH
V5352-SC	Volcano III®, 5.5HP 208-240V 1PH
V5354-3SC	Volcano III®, 5.5HP 440-480V 3PH
V5355-3SC	Volcano III®, 5.5HP 575V 3PH

STANDARD - 60Hz Specifications		
Horsepower	HT x DIA ft.	GPM
1.5	3 x 8.5	1324
3.5	4 x 12	2130
5.5	5 x 14	2734
ETNA - 60Hz Specifications		
Horsepower	HT x DIA ft.	GPM
1.5	5.5 x 12	527
3.5	7.5 x 20	862
5.5	9 x 28	1377

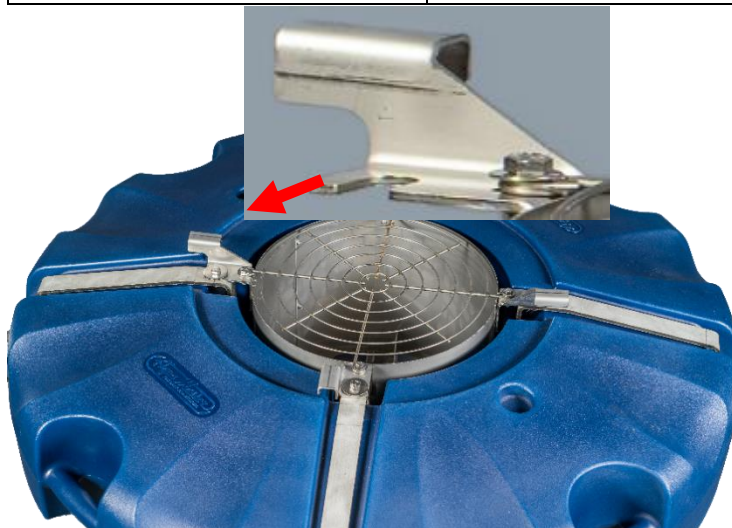

Tool-less, easy clean screen is installed using turn and lock handles for quick, easy release.